


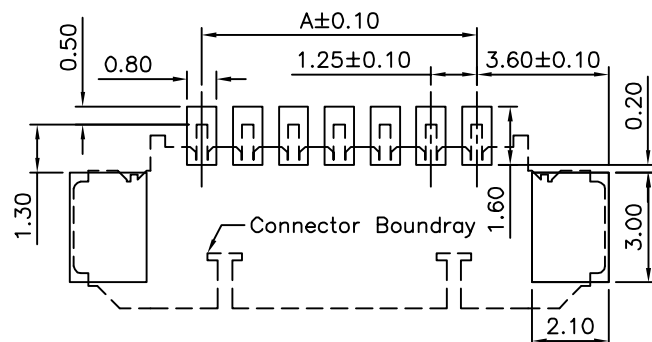

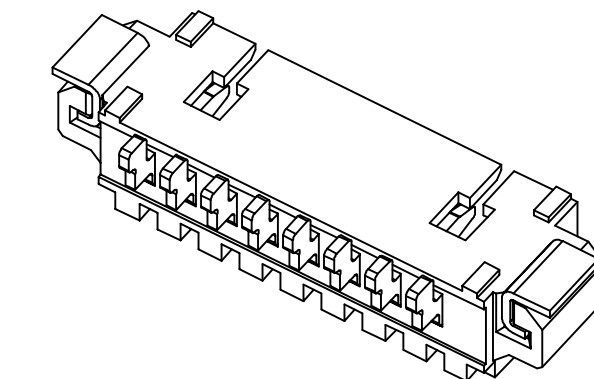
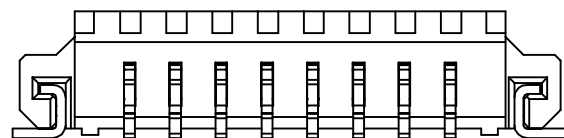
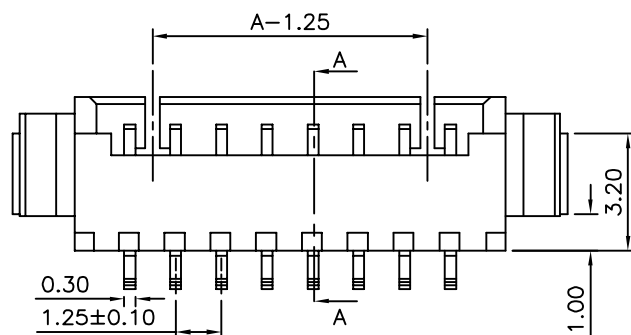
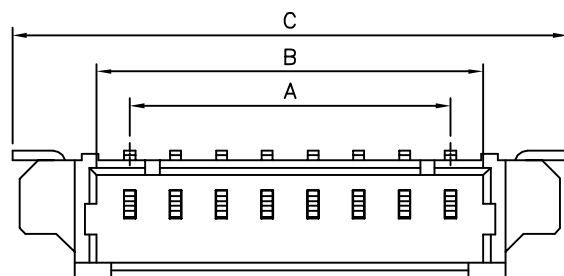


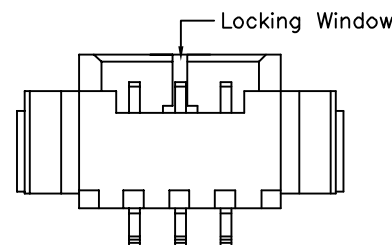

Recommended P.C.B. Layout



Section A-A



Locking Window
One Place For 2P,3P
Two Places For 4~20P

SPECIFICATION

Current Rating:1 Amp Max.
Operation Voltage:150V AC Max.
Withstand Voltage:500V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:500 Megaohms Min.
Operation Temperature:-40°C~+85°C
Insulator:PA9T(UL94V-0),Nature
⚠ Contact:Brass,Tin Plated Over Nickel
⚠ Locating:Brass,Tin Plated Over Nickel
RoHS Compliant

Pin	A	B	C
2	1.25	3.05	7.65
3	2.50	4.30	8.90
4	3.75	5.55	10.15
5	5.00	6.80	11.40
6	6.25	8.05	12.65
7	7.50	9.30	13.90
8	8.75	10.55	15.15
9	10.00	11.80	16.40
10	11.25	13.05	17.65
11	12.50	14.30	18.90
12	13.75	15.55	20.15
13	15.00	16.80	21.40
14	16.25	18.05	22.65
15	17.50	19.30	23.90
16	18.75	20.55	25.15
17	20.00	21.80	26.40
18	21.25	23.05	27.65
19	22.50	24.30	28.90
20	23.75	25.55	30.15

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

01259

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

SONG

REV.


A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.35
.XX ±0.20
ANG.


UNIT
mm

	A2	Modify Data	HZF	03/31/2014
	A1	Modify Data	HZF	02/25/2013
	A0	NEW RELEASE	HZF	05/07/2012
NO	REV	REVISIONS	CHK	DATE


SPECIFICATION
Q'ty:1000 PCS/Reel
RoHS Compliant

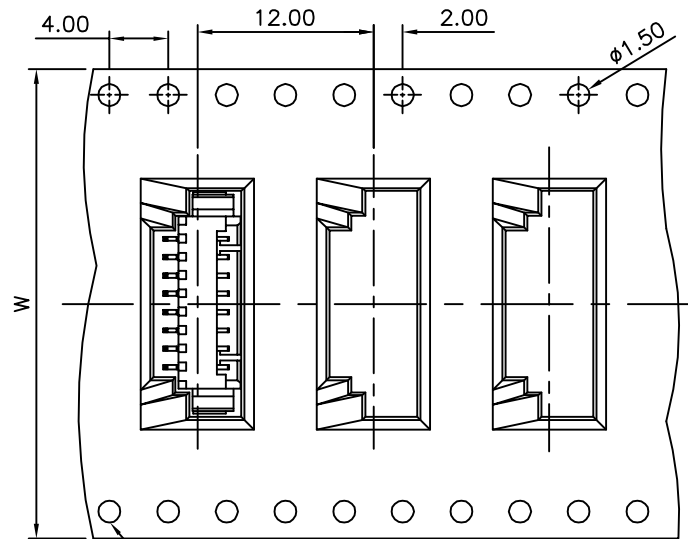

When W>32.00mm(Include W=32.00mm),
The Bottom Hole Of Tape Will Be Shown

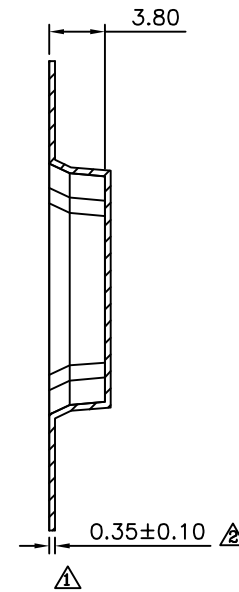

Pin	W
2	16.0
3~7	24.0
8	32.0
14	44.0



Gather Material Direction

Input Material Direction



4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

01259

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.3

.XX ±0.2

.XXX ±0.1

SCALE

NONE

REV.

A2

UNIT

mm



NO.

REV.

REVISIONS

CHK

DATE

A2

Modify Data

HZF

03/31/2014

A1

Modify Data

HZF

02/25/2013

A0

NEW RELEASE

HZF

05/07/2012