

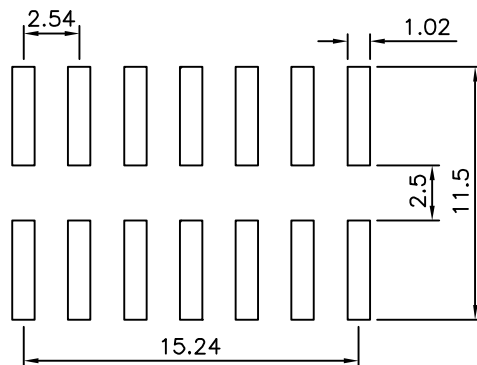



SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

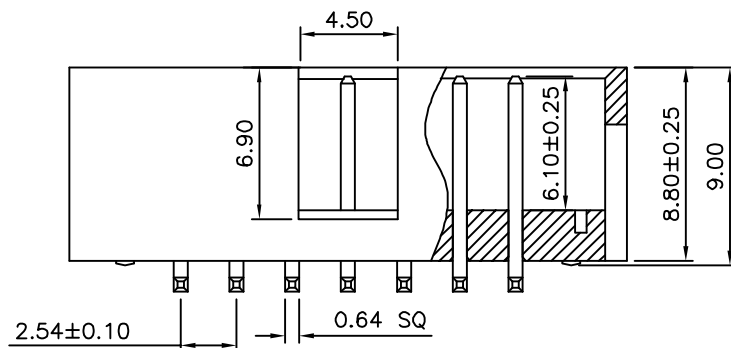

Recommended P.C.B. Layout
PCB Tolerance:±0.05 (Top View)

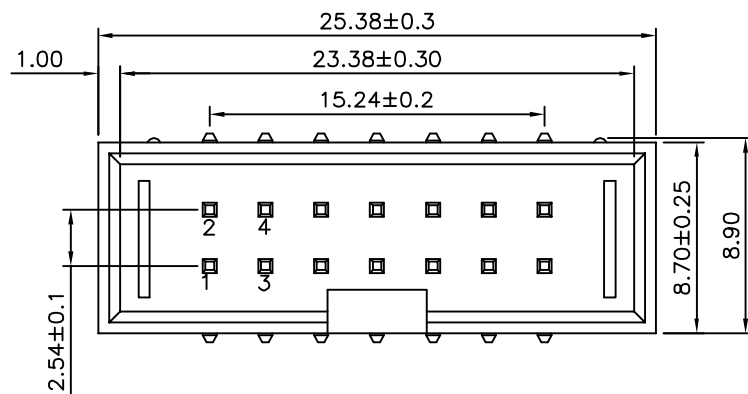

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20240

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

AOA

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.25 X." ±2"
.X ±0.20 .X" ±1.5"
.XX ±0.15 .XX" ±1"
.XXX ±0.10 .XXX" ±0.5"

UNIT
mm



NO.

REV.

AOA

NEW RELEASE

HZF

CHK

03/28/2016

DATE